


# Wall mounted unit

FTXF-D / RXF-D



sensira

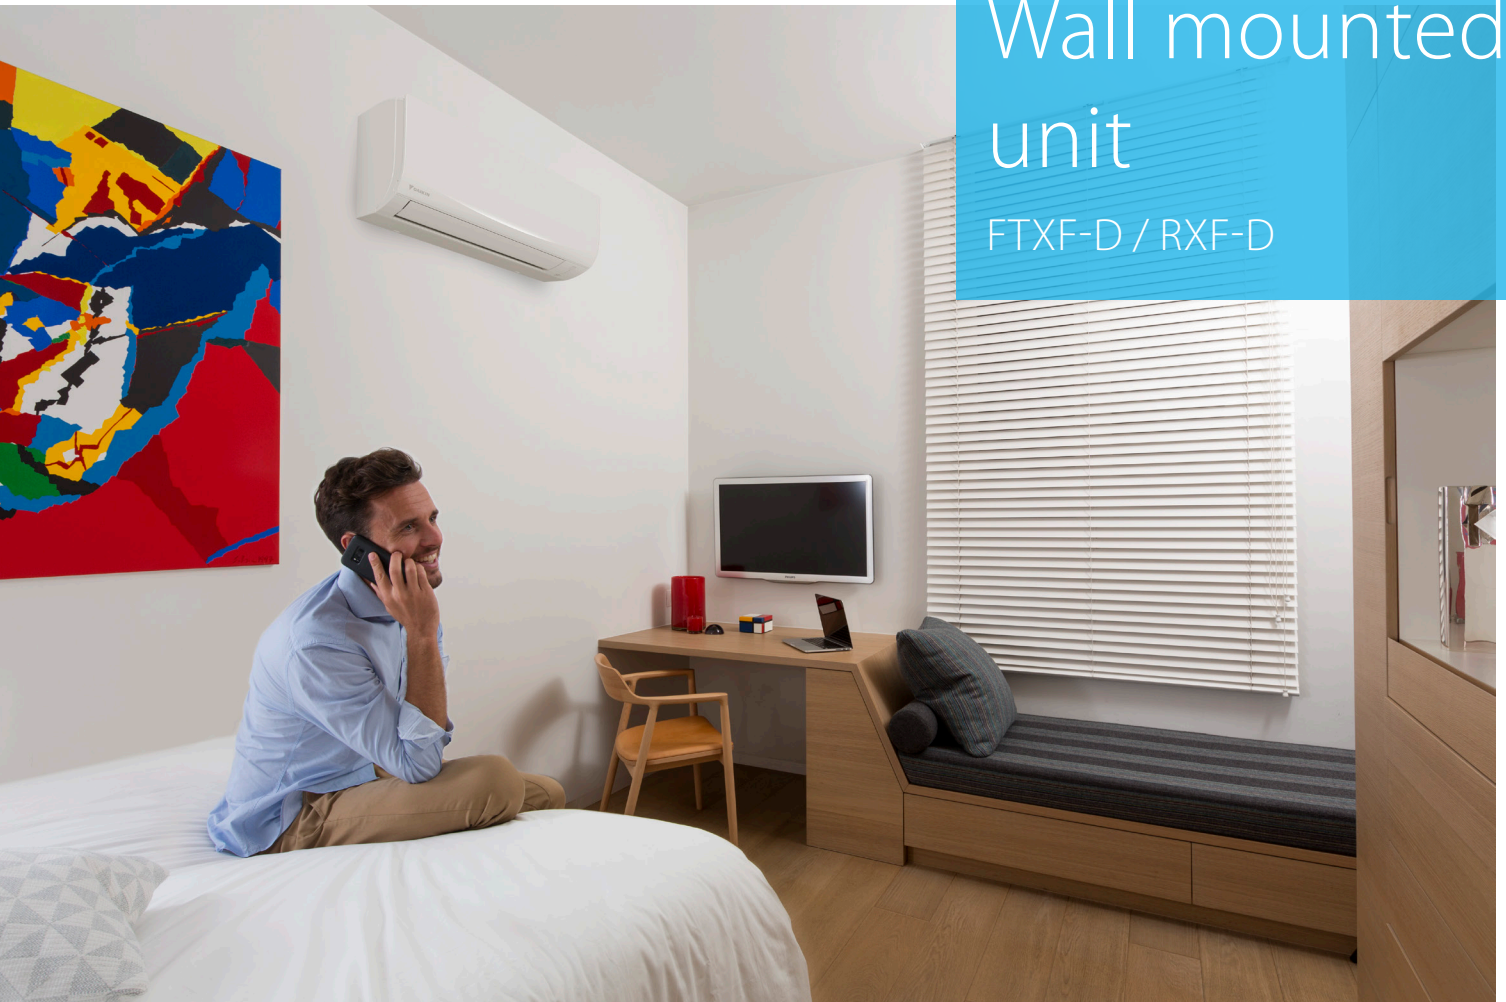

Fan speed steps



Econo mode



Energy saving during standby mode



Fan only



Comfort mode

Wall mounted unit for low energy consumption and pleasant comfort

- › Seasonal efficiency values up to A++ in cooling
- › Onecta app (optional)
- › Quiet in operation
- › Bluevolution range: lower environmental impact

# FTXF-D / RXF-D



RXF-D

FTXF-D

| Efficiency data                    |                           |                | FTXF + RXF | 20D + 20D         | 25D + 25D         | 35D + 35D         | 42D + 42D        | 50D + 50D        | 60D + 60D        | 71D + 71D        |       |      |
|------------------------------------|---------------------------|----------------|------------|-------------------|-------------------|-------------------|------------------|------------------|------------------|------------------|-------|------|
| Cooling capacity                   | Min./Nom./Max.            |                | kW         | 1.3 /2.00 /2.4    | 1.3 /2.50 /2.8    | 1.3 /3.30 /3.8    | 1.4 /4.20 /4.3   | 1.70 /5.00 /6.00 | 1.70 /6.00 /7.00 | 2.30 /7.10 /7.30 |       |      |
| Heating capacity                   | Min./Nom./Max.            |                | kW         | 1.30 /2.40 /3.30  | 1.30 /2.80 /3.70  | 1.30 /3.50 /4.40  | 1.40 /4.60 /5.00 | 1.70 /6.00 /7.70 | 1.70 /6.40 /8.00 | 2.30 /8.20 /9.00 |       |      |
| Power input                        | Cooling                   | Min./Nom./Max. | kW         | 0.31 /0.592 /0.72 | 0.31 /0.772 /1.05 | 0.31 /1.00 /1.40  | 0.31 /1.27 /1.50 | -1.50 /-         | -1.85 /-         | -2.77 /-         |       |      |
|                                    | Heating                   | Min./Nom./Max. | kW         | 0.25 /0.640 /0.95 | 0.25 /0.750 /1.11 | 0.25 /0.940 /1.50 | 0.25 /1.24 /1.40 | -1.62 /-         | -1.63 /-         | -2.21 /-         |       |      |
| Space cooling                      | Energy efficiency class   |                |            | A++               |                   |                   |                  |                  |                  | A                |       |      |
|                                    | Capacity                  | Pdesign        | kW         | 2.00              | 2.50              | 3.50              | 4.20             | 5.00             | 6.00             | 7.10             |       |      |
|                                    | SEER                      |                |            | 6.50              |                   |                   |                  |                  |                  | 6.21             | 6.15  | 5.15 |
| Annual energy consumption          |                           |                | kWh/a      | 108               | 135               | 188               | 226              | 282              | 342              | 483              |       |      |
| Space heating<br>(Average climate) | Energy efficiency class   |                |            | A+                |                   |                   |                  |                  |                  | A                |       |      |
|                                    | Capacity                  | Pdesign        | kW         | 2.20              | 2.40              | 2.60              | 3.30             | 4.60             | 4.80             | 6.20             |       |      |
|                                    | SCOP/A                    |                |            | 4.11              |                   |                   |                  |                  |                  | 4.30             | 4.06  | 3.81 |
|                                    | Annual energy consumption |                |            | kWh/a             | 749               | 818               | 885              | 1,075            | 1,585            | 1,654            | 2,275 |      |

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. Data for high efficiency series, Eurovent certified | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. Data for standard efficiency series | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range

| Indoor unit              |                         | FTXF                      |  | 20D                  | 25D                 | 35D                 | 42D                 | 50D                 | 60D                    | 71D                    |  |
|--------------------------|-------------------------|---------------------------|--|----------------------|---------------------|---------------------|---------------------|---------------------|------------------------|------------------------|--|
| Dimensions               | Unit                    | HeightxWidthxDepth        | mm                                       | 286 x770 x225        |                     |                     |                     | 295 x990 x263       |                        |                        |  |
| Weight                   | Unit                    |                           | kg                                       | 8.00                 |                     | 8.50                | 9.00                | 13.5                |                        |                        |  |
| Air filter               | Type                    |                           |  | Removable / washable |                     |                     |                     |                     |                        |                        |  |
| Fan                      | Air flow rate           | Cooling                   | Silent operation/<br>Low/Medium/<br>High | m³/min               | 4.3 /6.0 /8 /9.8    | 4.3 /6.2 /8 /10.0   | 4.4 /6.4 /8 /11.5   | 4.9 /6.9 /9 /12.6   | 10.5 /11.9 /14.4 /16.8 | 10.7 /12.2 /14.8 /17.3 |  |
|                          |                         | Heating                   | Silent operation/<br>Low/Medium/<br>High | m³/min               | 5.3 /6.2 /8.3 /10.4 | 5.3 /6.4 /8.4 /10.4 | 5.3 /6.5 /8.6 /11.9 | 5.2 /6.7 /8.8 /12.8 | 10.7 /12.2 /14.8 /17.3 | 11.3 /12.8 /15.8 /17.9 |  |
| Sound power level        | Cooling                 |                           | dBA                                      | 53.0                 | 54.0                |                     | 59.0                | 59                  | 60                     | 62                     |  |
|                          | Heating                 |                           | dBA                                      | 55.0                 |                     | 56.0                | 59.0                | 61                  | 62                     |                        |  |
| Sound pressure level     | Cooling                 | Silent operation/Low/High | dBA                                      | 20.0 /25.0 /39.0     | 20.0 /26.0 /40.0    | 20.0 /27.0 /43.0    | 22.0 /30.0 /45.0    | 31 /34 /43          | 33 /36 /45             | 34 /37 /46             |  |
|                          | Heating                 | Silent operation/Low/High | dBA                                      | 21.0 /28.0 /39.0     | 21.0 /28.0 /40.0    | 21.0 /29.0 /40.0    | 22.0 /28.0 /44.0    | 30 /33 /42          | 32 /35 /44             | 33 /36 /45             |  |
| Control systems          | Infrared remote control |                           |  | ARC470A1             |                     |                     |                     |                     |                        |                        |  |
|                          | Wired remote control    |                           |  | BRC073A1             |                     |                     |                     |                     |                        |                        |  |
| Piping connections Drain |                         |                           |  | 18                   |                     |                     |                     |                     |                        |                        |  |

Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 5m; level difference: 0m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m (horizontal) | See separate drawing for electrical data

| Outdoor unit         |         | RXF                |           | 20D           | 25D | 35D      | 42D     | 50D           | 60D     | 71D     |
|----------------------|---------|--------------------|-----------|---------------|-----|----------|---------|---------------|---------|---------|
| Dimensions           | Unit    | HeightxWidthxDepth | mm        | 550 x658 x275 |     |          |         | 734 x870 x373 |         |         |
| Weight               | Unit    |                    | kg        | 24.0          |     | 28.0     | 46.0    | 50.0          |         |         |
| Sound power level    | Cooling |                    |           | -             |     |          |         |               |         |         |
| Sound pressure level | Cooling | Low/Nom./High      | dBA       | -/-/46.0      |     | -/-/48.0 |         | -/47 /-       | -/49 /- | -/52 /- |
|                      | Heating | Low/Nom./High      | dBA       | -/-/47.0      |     | -/-/48.0 |         | -/49 /-       | -/52 /- |         |
| Operation range      | Cooling | Ambient            | Min.~Max. | °CDB          |     |          | -10 ~48 |               |         |         |
|                      | Heating | Ambient            | Min.~Max. | °CWB          |     |          | -15 ~18 |               |         |         |

Daikin Europe Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · <https://www.daikin.eu> · RPR Oostende (Responsible Editor)

JÄLLEENMYYJÄ MR.LVI LÄMPÖPUMPPUHUOLTO.COM

myymälä: Muuntotie 1 D 3  
01510 Vantaa  
puhelin: 0300 30 80 82  
e-mail: info@mrlvi.fi  
avoinna: ma-pe klo 8-16

KLIKKAA TÄSTÄ VERKKOKAUPPAAN! →



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)

ECPEN22-050

01/2022

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

